

Part Number Designation

SO - M4 - 16 ZI
 ↓ ↓ ↓ ↓
 型号 螺纹 长度 电镀
 代码 代码 码 代号




单位尺寸: MM, All Dimensions are in millimeters

螺纹*螺距	型号TYPE				螺纹代 码	长度码					最小 板厚	板孔径 +0.08	C -0.13	B ±0.13	H ±0.15	最小 边距			
	碳钢	不锈钢	不锈钢	铝		LENGTH CODE "L" +0.05-0.13													
M3*0.5	SO	SOS	SO4	SOA	M3	3	10	16	22	28	1	4.2	4.2	3.2	4.75	6			
					3.5M3	4	11	17	25	30	1	5.4	5.39	3.2	6.35	6.8			
M3.5*0.6					5	12	18		32	1	5.4	5.39	3.9	6.35	6.8				
M4*0.7					6.0M4	6	13	19			1	6	5.98	4.5	7	7.5			
					M4	7	14	20			1.3	7.14	7.12	4.5	7.9	8			
M5*0.8					M5	8	15			1.3	7.14	7.12	5.35	7.9	8				
M6*1					M6	9				1.3	8.75	8.72	6.4	10	10				
D ±0.25					NA	4	8	11	12										

单位尺寸: 英寸, All Dimensions are in inches


螺纹尺寸	型号TYPE				螺纹代 码	长度码LENGTH CODE "L" +0.002 -0.005 (长度码L/32英寸)				最小 板厚	板孔径 +.003	C -.005	B ±.005	H ±.004	最小 边距			
	碳钢	不锈钢	不锈钢	铝		LENGTH CODE "L" +0.002 -0.005 (长度码L/32英寸)												
.112-40 (#4-40)	SO	SOS	SO4	SOA	440	4	12	20	28	.040	.166	.165	.125	.187	.230			
					6440	6	14	22	30	.040	.213	.212	.125	.250	.270			
.138-32					632	8	16	24	32	.040	.213	.212	.156	.250	.270			
(#6-32)					8632	10	18	26	34	.050	.281	.280	.156	.312	.310			
					832	.050	.281	.280	.188	.312	.310							
.164-32 (#8-32)					032	.050	.281	.280	.203	.312	.310							
.190-32 (#10-32)																		
D ±.01					NA	.187	.312	.432										

通孔无螺纹式螺柱 SO SOS SOA

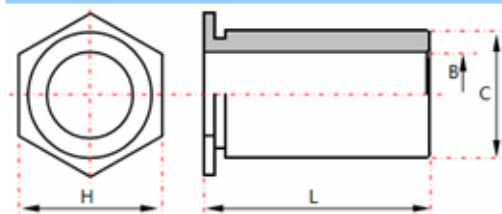

Part Number Designation

SO - 43.1 - 10 ZI
 ↓ ↓ ↓ ↓
 型号 规格 长度 电镀
 代号 码 代号



单位尺寸: MM, All Dimensions are in millimeters

孔径B +0.1 -0.08	型号TYPE			规格 代号	长度码			最小 板厚	板孔径 +0.08	C -0.13	B +0.1 -0.08	H ±0.1	最小 边距
	碳钢	不锈钢	铝		LENGTH CODE "L" +0.05-0.13								
3.1	SO	SOS	SOA	43.1	3	9	18	1	4.2	4.2	3.1	4.75	6
				63.1	4	10	20	1	5.4	5.39	3.1	6.35	6.8
3.6				63.6	5	12		1	5.4	5.39	3.6	6.35	6.8
				83.6	6	14		1.3	7.14	7.12	3.6	8	8
4.1				84.1	7	15		1.3	7.14	7.12	4.1	8	8
5.1				85.1	8	16		1.3	7.14	7.12	5.1	8	8

单位尺寸: 英寸, All Dimensions are in inches

孔径B +.004 -.003	型号TYPE			规格 代号	长度码			最小 板厚	板孔径 +.003	C -.004	B +.004 -.003	H ±.004	最小 边距
	碳钢	不锈钢	铝		LENGTH CODE "L" +0.002 -0.005 LENGTH CODE IN 32THS OF AN INCH								
.116	SO	SOS	SOA	4116	4	16		.040	.166	.165	.116	.187	.23
				6116	6	18		.040	.213	.212	.116	.250	.27
.143				6143	8	20		.040	.213	.212	.143	.250	.27
				8143	10	22		.050	.281	.280	.143	.315	.31
.169				8169	12	24		.050	.281	.280	.169	.315	.31
.194				8194	14			.050	.281	.280	.194	.315	.31